

# BUILDING QUOTE

**QUOTATION FOR:** 

Pole Barn Kit

**BUILDING SPECIFICATIONS:** 64' X 104' X 16' POST FRAME PACKAGE:

#### **MATERIAL PACKAGE**

- Pre-Engineered Wood Trusses (4/12 Pitch, 4' O/C)
- 4Ply 2x6 Laminated Columns On Eaves & Gables (8' O/C)
- One Concrete Footer Pad per Post Hole
- 2 x 8 Treated T&G Skirt Boards (2 Rows)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 12 Double Top Girt Truss Carriers
- 40 YR. Warranty 28 Gauge Parallel Rib Steel Siding
- 40 YR. Warranty 28 Gauge Parallel Rib Steel Roofing
- Dr!p Stop Vapor Barrier under Steel Roofing
- Continuous Flexo-O-Vent Ridge Vent

### **DOORS & WINDOWS**

- Two 16 X 14 Clopy 4050 Overhead Door
- One 3' 9 Lite Fiberglass Entry Door
- Two 4' x 3' Insulated Slider Windows

### **FASTENERS**

- 1 In. Screws for Steel Wall Panels
- 1 1/2 In. Screws for Steel Roof Panels
- 4 In. Grk Structural Screws for Truss Carriers
- 4 In. Galv. Pole Barn Nails for Skirt Board
- 3" Paslode Framing Nails For Framing
- 12" OVERHANG ON ALL SIDES W/ VENTED SOFFIT
- OVER 20 METAL COLORS TO CHOOSE FROM

#### THE BUYER IS RESPONSIBLE FOR THE FOLLOWING:

Site Preparation, Stone, Concrete Floor Labor For The Building Construction Building & Zoning Permits If Needed


## **COUNTRY BUILDING CO.**

19 Free Road Shiloh, OH 44878 PH: 419-895-0040

building@countrybuildingco.com

CONSTRUCTION: DIMENSIONS:

Post Frame 64' X 104' X 16'

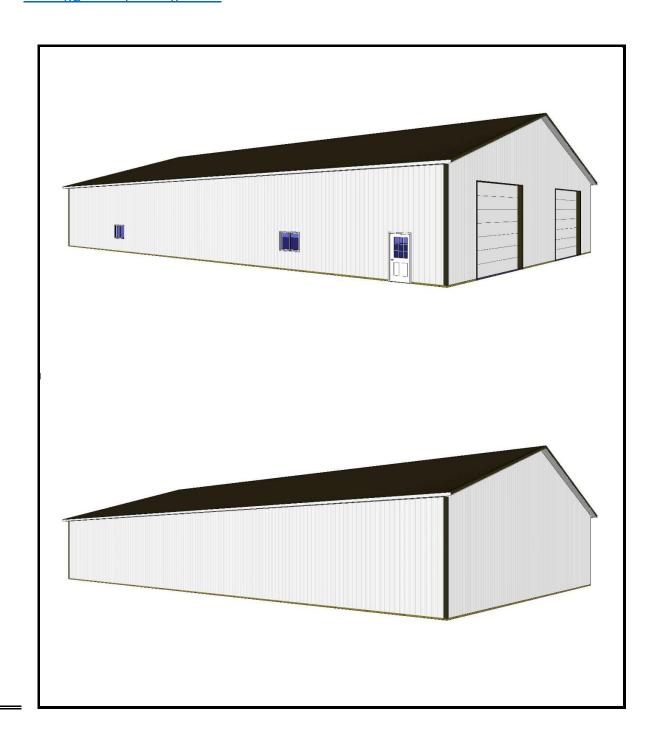

# \*\*\*\* ADD-ON OPTIONS FOR 64X104X16 \*\*\*\*

- Interior Package w/ Metal Liner & Insulation Add \$25,625.00
- 8' x 16' Porch Package w/ Ceiling & Header Wrap Add \$2,264.00
- Laminated Green Post Savers Add \$2,488.00
- 36" Louvered Cupola & Weathervane Add \$690.00
- 6" K-Gutter Package w/ Downspouts Add \$1,278.00
- Lifetime Screws Package For Roof & Sides Add \$1,172.00
- 36" Wainscoating Add \$540.00

**Note: Options Need To Be Added To The Grand Total** 

All Pricing Is Subject To Change Without Notice.

Please Check With Our Sales Team To Verify Current Pricing.