



BUILDING QUOTE

QUOTATION FOR:

Pole Barn Kit

COUNTRY BUILDING CO.

19 Free Road
Shiloh, OH 44878
PH: 419-895-0040

building@countrybuildingco.com

CONSTRUCTION:

Post Frame

DIMENSIONS:

80' X 160' X 18'

BUILDING SPECIFICATIONS :

80' X 160' X 18' POST FRAME PACKAGE:

MATERIAL PACKAGE

- Pre-Engineered Wood Trusses (3.5/12 Pitch, 4' O/C)
- 3Ply 2x8 Laminated Columns On Eaves & Gables (8' O/C)
- One Concrete Footer Pad per Post Hole
- 2 x 8 Treated T&G Skirt Boards (2 Rows)
- 2 x 4 Wall Girts (24" O/C) and Roof Purlins (24" O/C)
- 2 x 12 Double Top Girt Truss Carriers
- 40 YR. Warranty 28 Gauge Parallel Rib Steel Siding
- 40 YR. Warranty 28 Gauge Parallel Rib Steel Roofing
- Dr!p Stop Vapor Barrier under Steel Roofing
- Continuous Flexo-O-Vent Ridge Vent

DOORS & WINDOWS

- Two 20 X 16 Clopay 4300 Overhead Doors
- Two 3' 9 Lite Fiberglass Entry Door
- Two 4' x 3' Insulated Slider Windows


FASTENERS

- 1 In. Screws for Steel Wall Panels
- 1 1/2 In. Screws for Steel Roof Panels
- 4 In. Grk Structural Screws for Truss Carriers
- 4 In. Galv. Pole Barn Nails for Skirt Board
- 3" Paslode Framing Nails For Framing

- **18" OVERHANG ON ALL SIDES W/ VENTED SOFFIT**
- **OVER 20 METAL COLORS TO CHOOSE FROM**

THE BUYER IS RESPONSIBLE FOR THE FOLLOWING:

Site Preparation, Stone, Concrete Floor
Labor For The Building Construction
Building & Zoning Permits If Needed

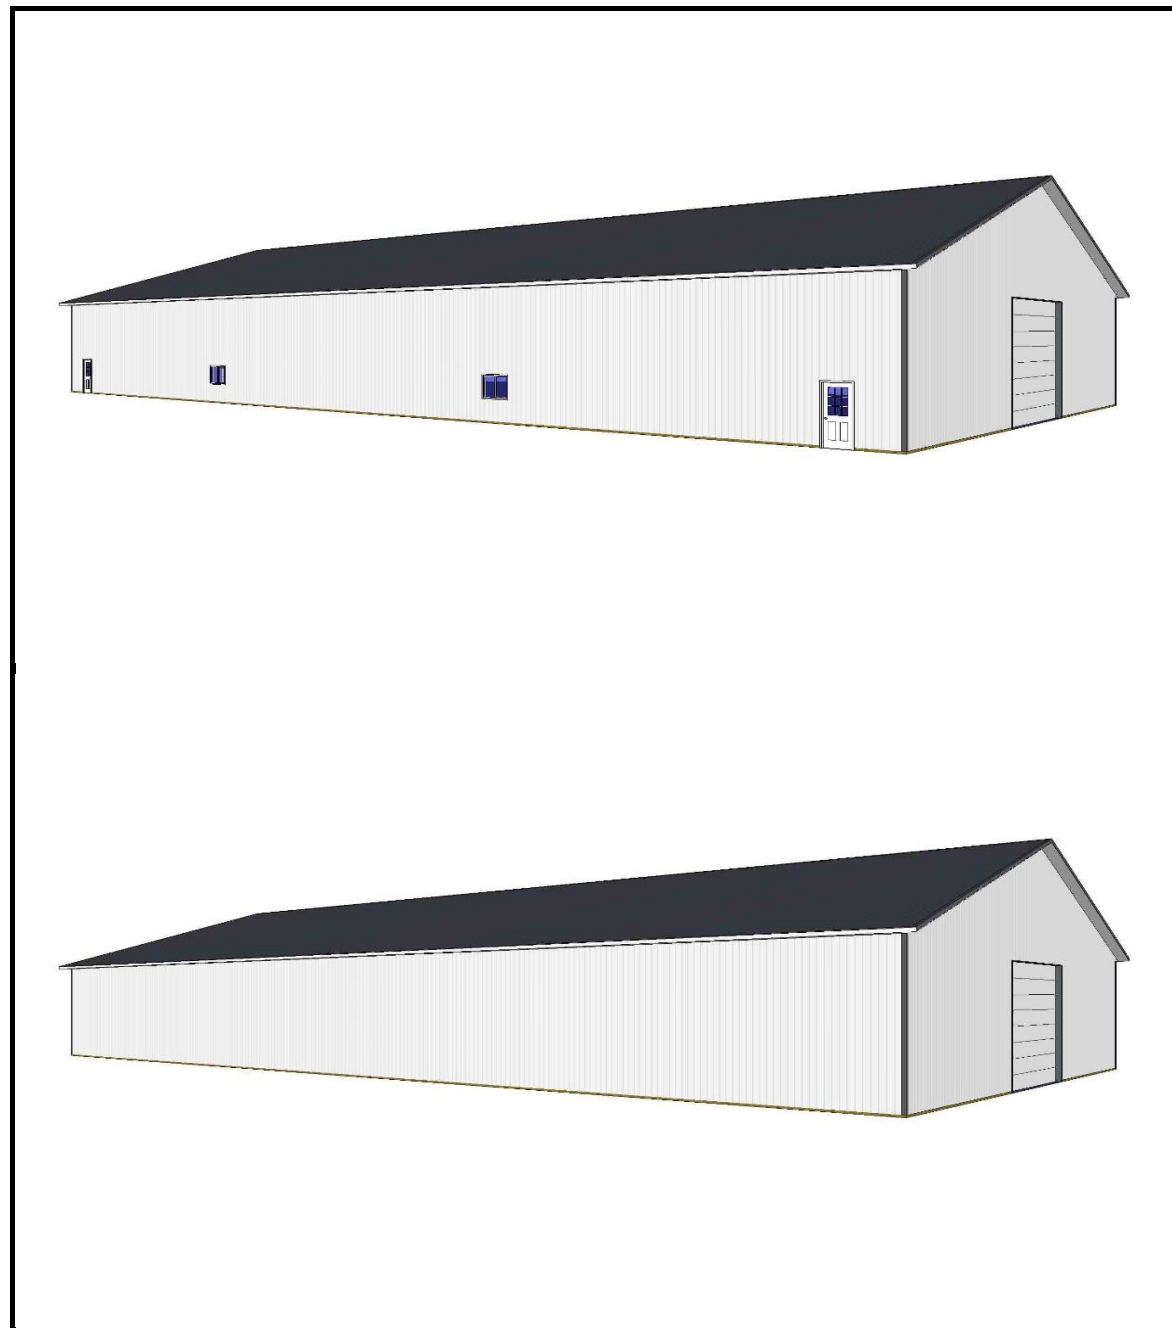

****** ADD-ON OPTIONS FOR 80X160X18 ******

- Interior Package w/ Metal Liner & Insulation Add \$45,470.00
 - 8' x 16' Porch Package w/ Ceiling & Header Wrap Add \$2,264.00
 - Laminated Green Post Savers Add \$4,050.00
 - 36" Louvered Cupola & Weathervane Add \$690.00
 - 5" K-Gutter Package w/ Downspouts Add \$ 1,840.00
 - Lifetime Screws Package For Roof & Sides Add \$2,014.00
 - 36" Wainscoating Add \$769.00
-

Note: Options Need To Be Added To The Grand Total

All Pricing Is Subject To Change Without Notice.
Please Check With Our Sales Team To Verify Current Pricing.